






SINGLE-PHASE INPUT & OUTPUT | 120 V & 240 V
NEMA 3R OUTDOOR ENCLOSURE | 1/3-2 HP

ES

CONSTANT PRESSURE

VARIABLE FREQUENCY DRIVE

-  Large Graphic Display
-  Simple Constant Pressure Setup
-  Simple Installation
-  Easy Setup Wizards
-  NEMA 3R (Outdoor Enclosure)

Dimensions

(Height" x Width" x Depth")

ES3R-A


13" x 10" x 5"



Single-Phase Input & Output

Compatible with Two-Wire & Three-Wire Motors

Our ES drive provides single phase input and output for easy residential and light commercial constant pressure installations for both two and three wire pump motors.

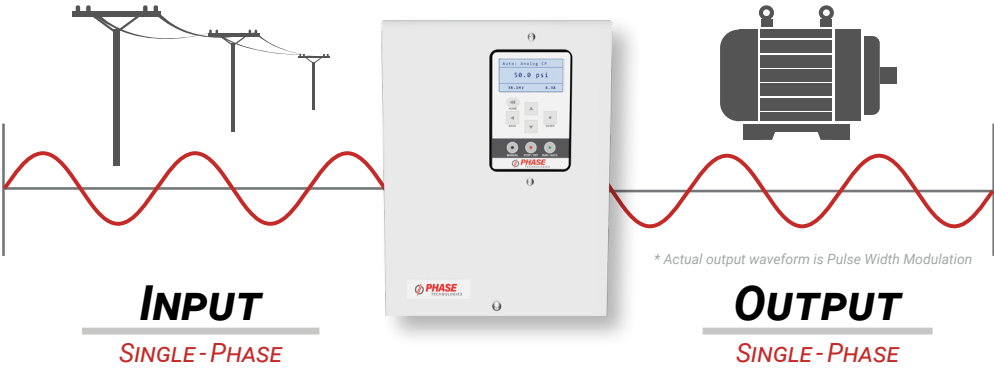

Product Specifications

	Motor Horsepower	Rated Current (Input)	Fuse/Circuit Breaker Rating (Recommended)
120 V	1/3	8 A	10 A
	1/2	12 A	15 A
	1	24 A	25 A
240 V	1/2	6 A	10 A
	3/4	9 A	15 A
	1	12 A	15 A
	1.5	18 A	25 A
	2	24 A	30 A

INDUSTRY
BEST LEAD TIMES

MADE IN THE USA

VISIT OUR WEBSITE FOR MORE INFO
PHASETECHNOLOGIES.COM

Cutsheet - ES Series v3.1_10172025

